

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 35 TOWNSHIP 17 RANGE 2

DATE: 4-13-02 4-10-08

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County 4-11-97

IN. S.P.C. E ZONE NAD '83

NAME: 17023504 Shanghai Cir

N: 513720.7189(m)

E: 47630.9780(m)

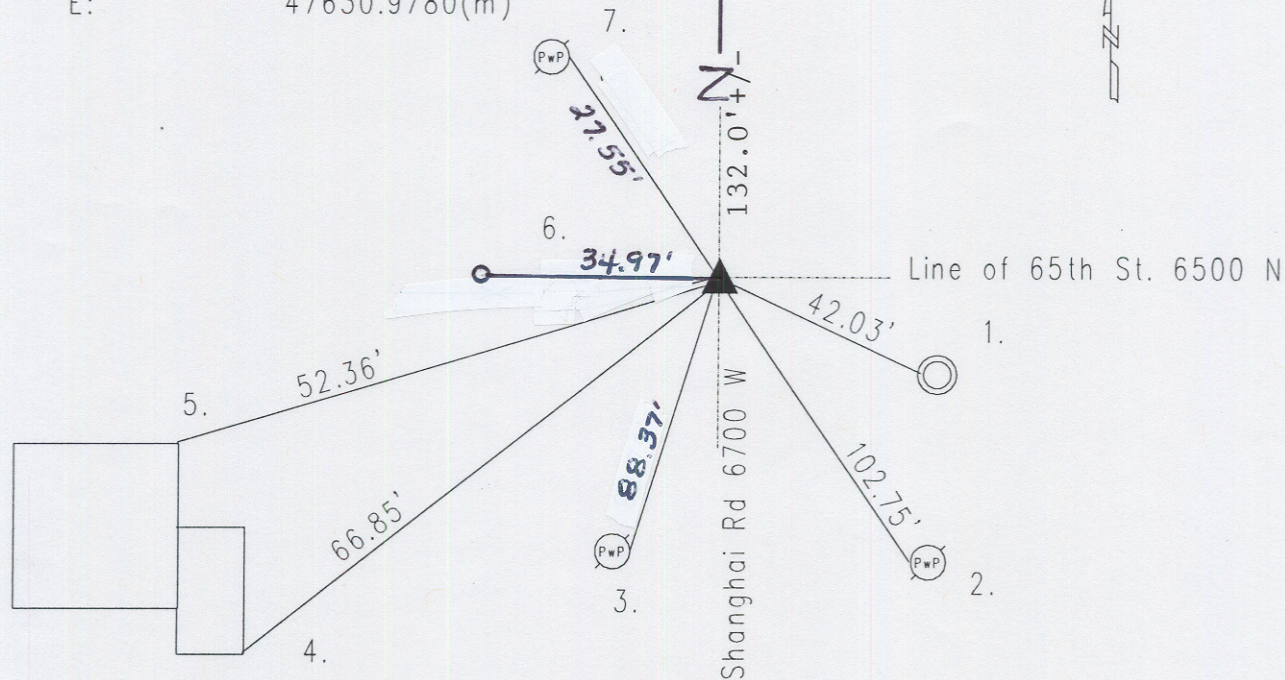

Original post set 1821 by Laughlin with witnesses: 10" beech N 28 W 16 links; 12' beech S 14 E 12 links per Marion County Atlas pg. 7. Hosbrook 9-5-1853 called stone. 9-15-1856, no surveyor name, called the same., both entries are the E Q 34-17-2 per Pike Township Legal Survey Book pg. 47. Smith 4-12-1899 called point 'H' (stone witness W 20' per Pike Township Legal Survey Book pg. 46.) 1-24-64 called E Q 34-17-2. 4-10-73 called stone 10" dn. 5-14-75 called PK nail in washer over stone. Excavated 9-25-86 and stone fd 12" down. Harrison set. Re-tied 4-11-97 by Wilcoxon. Re-tied 4-13-02 by Wilcoxon. 17023504

REF.	DISTANCE	DESCRIPTION
1.	42.03'	Cut 'x' W-edge of sewer manhole
2.	102.75'	PK nail W PwP#323-293 12"up
3.	88.37'	<del>PK nail</del> <sup>mag</sup> E PwP#83-293 <del>10"</del> up <sup>15"</sup>
4.	66.85'	Top corner SE porch slab
5.	52.36'	NE corner of ADDRESS 6502
6.	34.97'	Due W to Troy Newport : Crossroad:inside 1" pipe fd
7.	27.55'	PK nail E PwP#6-253 4"up